


SPECIFICATION

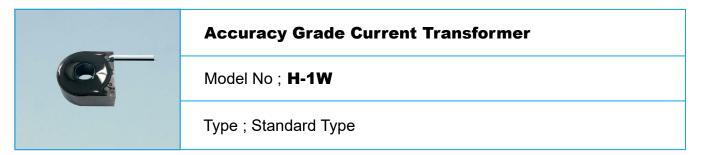

DIMENSION






CHARACTERISTICS

ITEM	PROPERTY	CONDITION
CURRENT RATIO	2500:1	
RATED CURRENT	50A / 20mA	
OUT PUT(E2)	200mV	IN PUT 50A, at Load R=10Ω
RATIO ERROR	0.2% max.	PRIMARY RATED'S (100%~1.67%)
PHASE ANGLE ERROR	0.2° max.	PRIMARY RATED'S (100%~1.67%)

TEST DIAGRAM







주식회사 성한트랜스텍 34, Yeonseo-ro-gil.Eunpyeong-gu, Seoul, Korea SUNGHAN TRANSTEK CO.,LTD T. 02-352-8414 / E-mail : sunghan@transtek.co.kr