
	Zero Phase Current Transformer
	Model No ; SH6.5N
	Type ; Standard Type

DIMENSION

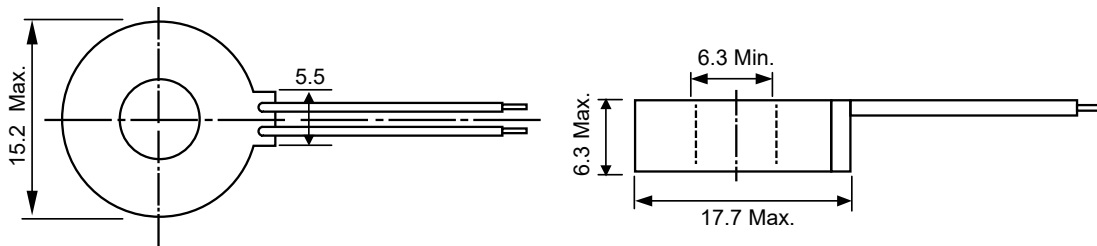


CHARACTERISTICS

ITEM	PROPERTY	CONDITION
OUTPUT	$E_2 : 10 \sim 11 \text{mV}$	$I_0: 12 \text{mA}$ $R: 680 \Omega$ $f: 60 \text{Hz}$
REMANENCE MAGNETISM	$\tau : 10\% \text{ max.}$	Primary input DC 10A.
THERMAL PROPERTY	$\tau : \pm 10\% \text{ max.}$	$-20 \sim 80^\circ \text{C}$ output voltage ratio
PERMISSIBLE UNBALANCE	$V_2 : 7.5 \text{mV max.}$	$I_1: 150 \text{A}$ $R: 680 \Omega$ RMS value when rotate 360°

TEST DIAGRAM

<OUT PUT>

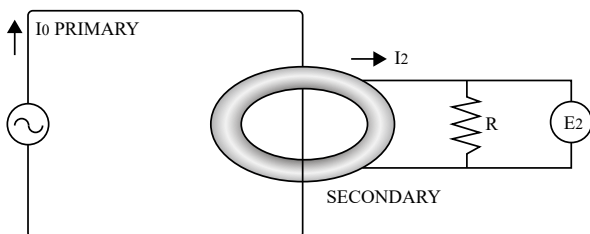

<PERMISSIBLE UNBALANCE>

