
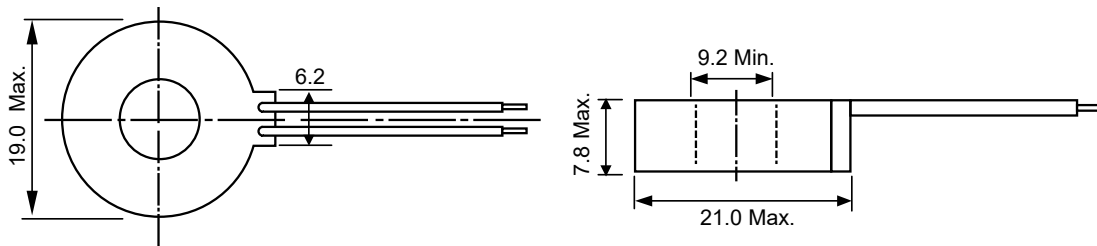


# SPECIFICATION

|   |                                       |
|---|---------------------------------------|
|  | <b>Zero Phase Current Transformer</b> |
|   | Model No ; <b>SH10</b>                |
|   | Type ; Standard Type                  |

## DIMENSION




## CHARACTERISTICS


| ITEM                  | PROPERTY                   | CONDITION   |
|-----------------------|----------------------------|---|
| OUTPUT                | E : 17~21mV                | IO:25mA R:1kΩ f:60Hz                                      |
| REMANENCE MAGNETISM   | $\tau$ : 10% max.          | Primary input DC 10A.                                     |
| THERMAL PROPERTY      | $\tau$ : $\pm 10\%$ max.   | -20~80°C output voltage ratio                             |
| PERMISSIBLE UNBALANCE | V <sub>2</sub> : 10mV max. | I <sub>1</sub> :600A R:500Ω<br>RMS value when rotate 360° |

## TEST DIAGRAM

<OUT PUT>

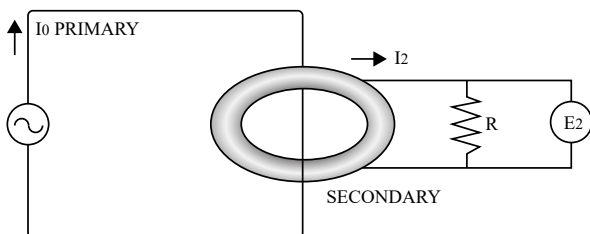

<PERMISSIBLE UNBALANCE>

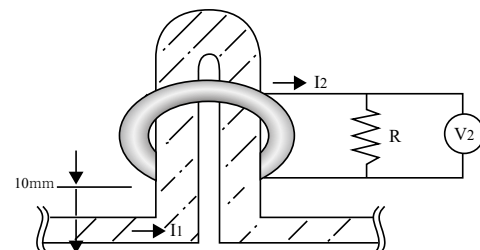

주식회사 성한트랜스텍 34, Yeonso-ro 9-gil, Eunpyeong-gu, Seoul, Korea  
SUNGHAN TRANSTEK CO.,LTD T. 02-352-8414 / E-mail : sunghan@transtek.co.kr