

SPECIFICATION




Zero Phase Current Transformer

Model No ; **SH403**

Type ; Standard Type

DIMENSION

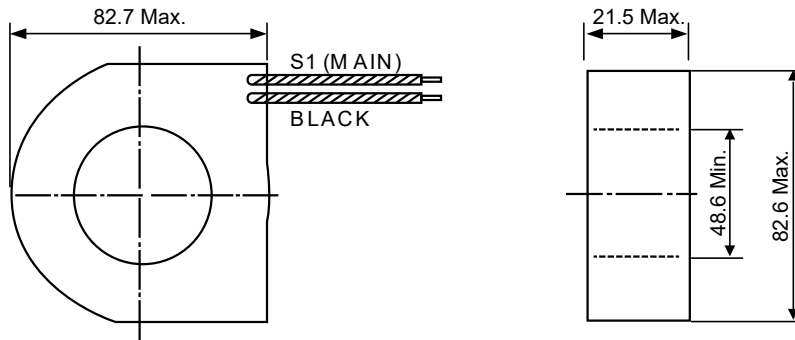


CHARACTERISTICS


ITEM	PROPERTY	CONDITION
OUTPUT	$E_2 : 17 \sim 21 \text{mV}$	$I_0 : 22.5 \text{mA}$ $R : 1 \text{k}\Omega$ $f : 60 \text{Hz}$
REMANENCE MAGNETISM	$\tau : 6\% \text{ max.}$	Primary input DC 10A.
THERMAL PROPERTY	$\tau : \pm 10\% \text{ max.}$	$-10 \sim 80^\circ \text{C}$ output voltage ratio
PERMISSIBLE UNBALANCE	$V_2 : 10 \text{mV max.}$	$I_1 : 2400 \text{A}$ $R : 370 \Omega$ RMS value when rotate 360°

TEST DIAGRAM

<OUT PUT>

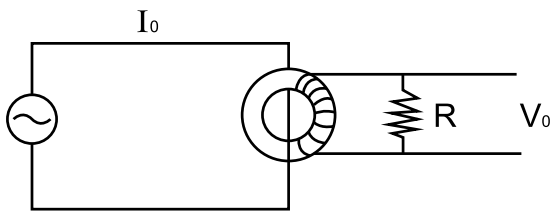

<PERMISSIBLE UNBALANCE>

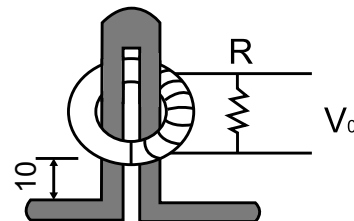

주식회사 성한트랜스텍 34, Yeonso-ro 9-gil, Eunpyeong-gu, Seoul, Korea
SUNGHAN TRANSTEK CO.,LTD T. 02-352-8414 / E-mail : sunghan@transtek.co.kr